


► Series NT

Volute Casing Centrifugal Pump in base plate design up to PN 10

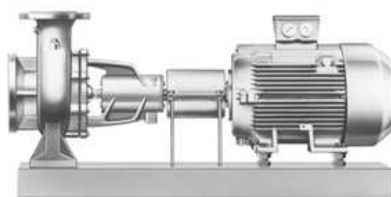

► Pumped Liquid

Pure water, industrial water, sea water, condensate, oils, brines, lyes, hot water. The liquids to be pumped must not contain any abrasive particles nor chemically attack the construction materials of the pump.

► Main Fields Of Application

Cooling and heating circulating systems, water treatment, desalination, dust separation and spray-coat plants, air conditioning, cooling, swimming pool and industrial techniques

► Performance Data

Capacity	Q	up to	2300	m ³ /h
Delivery head	H	up to	145	m
Discharge pressure	pd	up to	10/16	bar
Fluid temperature	t	up to	140	°C

► Construction features

Casing dimension and rated output acc. to DIN EN 733/EN 733
Base plate design (pump and motor mounted on a base plate)
Dry installation
Horizontal installation
Bearing bracket design
Spacer coupling (optional)
2-stage pump type at defined sizes

Document free of charge by phone +49 7732 86-382 fax +49 7732 86-99382

ALLWEILER GmbH
PO Box 1140
D-78315 Radolfzell Germany
Phone.: +49 (0)7732 86-0
Fax: +49 (0)7732 86-436
E-mail: service@allweiler.de
Internet: <http://www.allweiler.com>